


## Data Sheet

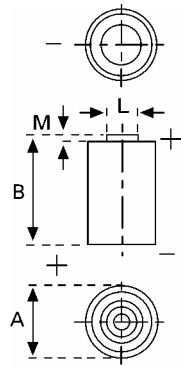

**Type Number** ..... 6205  
**Designation IEC** ..... CR 17345  
**System** ..... Li-Manganese dioxide / Organic Electrolyte

**UL Recognition:**..... MH 13654 (N)  
**Nominal Voltage** ..... 3 V  
**Typical Capacity C** ..... 1500 mAh  
 Load 200 Ohm, at 20°C down to 2 V

**Weight (approx.)** ..... 17 g  
**Volume** ..... 7 ccm  
**Coding**..... TBA

**Temperature Ranges** min max.  
 Storage ..... -20°C 65°C  
 Discharge ..... -20°C 65°C

**Dimensions** min max.  
 Diameter (A) ..... 16 17  
 Height (B) ..... 33,9 34,5  
 Shoulder Diameter[L]..... 6,4  
 Shoulder Height [M]..... 1,29

**Segment** ..... Electronic

**Main Applications** ..... Photo Electronic Devices

### Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	2.0 V
Continuous 24h/d,7d/w	200 Ω	Time:	100 h
		Capacity [mAh]:	1500

All Data contained herein is for single cells

For battery applications, performance data may vary from single cell data, depending on specific battery configuration