


ENERGIZER NO. L91

AA



Industry Standard Dimensions in mm (inches)

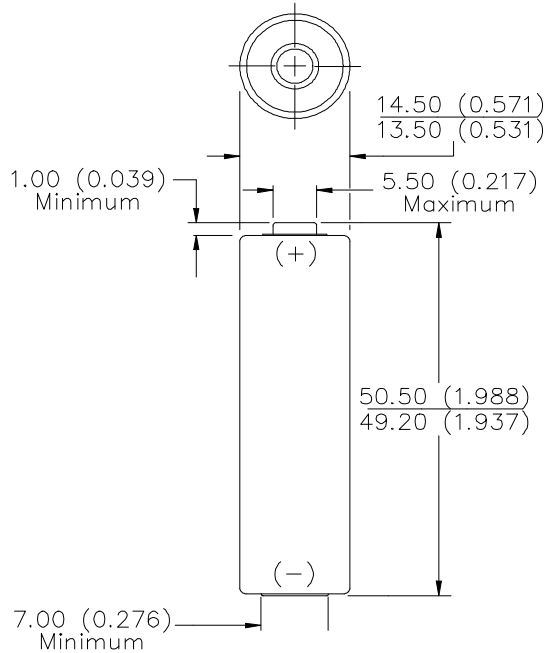

Chemical System: Lithium
 Lithium/Iron Disulfide (Li/FeS₂)

Designation: ANSI / NEDA 15LF

Battery Voltage: 1.5 Volts

Average Weight: 14.5 grams (0.5 oz.)

Volume: 8.0 cubic centimeters (0.5 cubic inch)

Storage Temp: -40°C to 60°C (-40°F to 140°F)

Operating Temp: -40°C to 60°C (-40°F to 140°F)

Average Capacity: 2900 mAh (to 1.0 volts)
 (Rated capacity at 200 mA drain.)

Max Discharge: 2.0A Continuous


Lithium Content: Less than 1 gram (0.04 oz.) per cell

Jacket: Non-magnetic Plastic Label


Transportation: Meets requirements of 49CFR 173.185 (b) and IATA special provisions A45.

Shelf Life: 10 years (+)


CONSTANT CURRENT DISCHARGE
 Typical Service

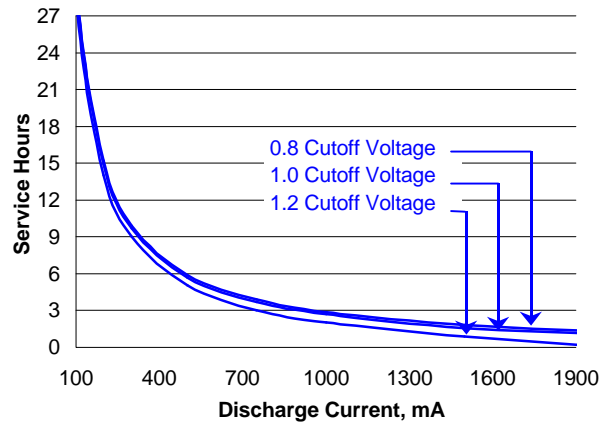

CONSTANT POWER DISCHARGE
 Continuous @ 20°C to 0.9 volts

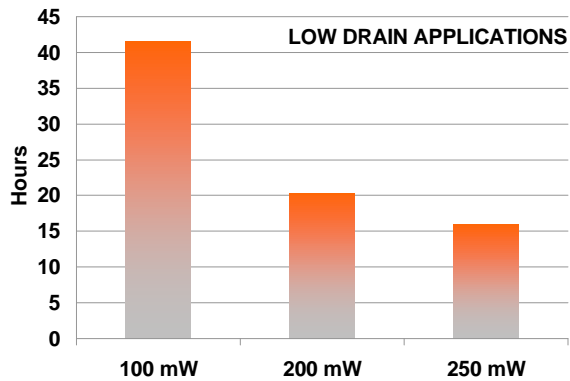

CONSTANT POWER DISCHARGE
 Continuous @ 20°C to 1.0 volts

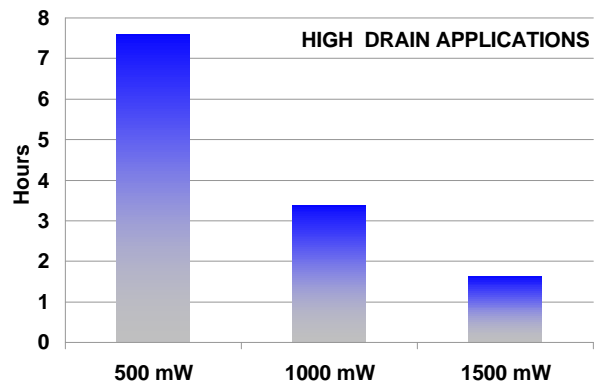

Important Notice



This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.







Copyright © Eveready Battery Co. Inc. - All Rights Reserved

ENERGIZER NO. L91

Temperature Effects

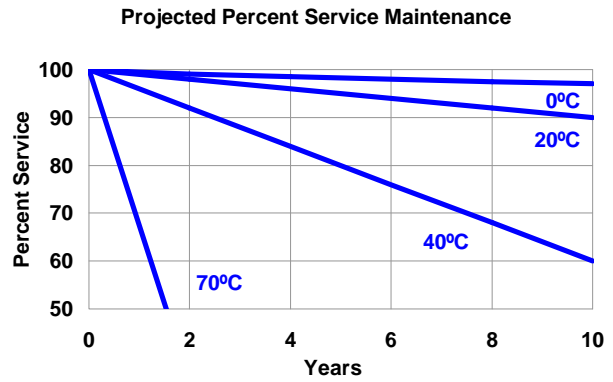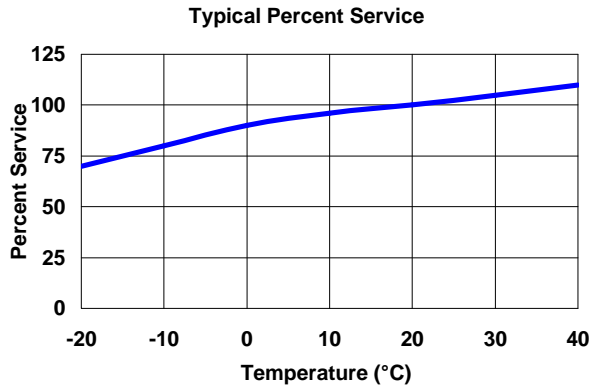

ANSI - IEC Industry Standard Tests @ 20° C

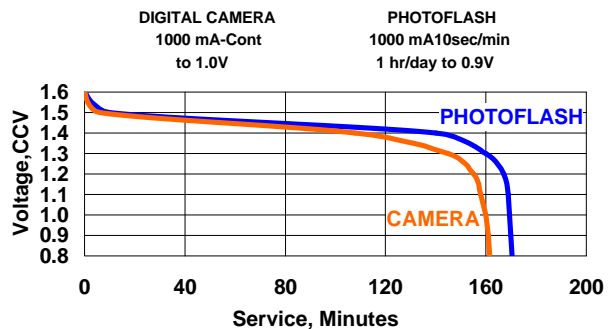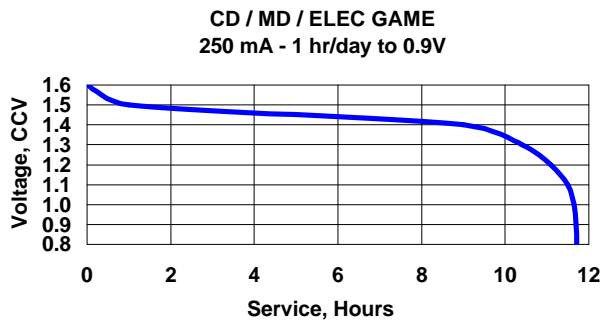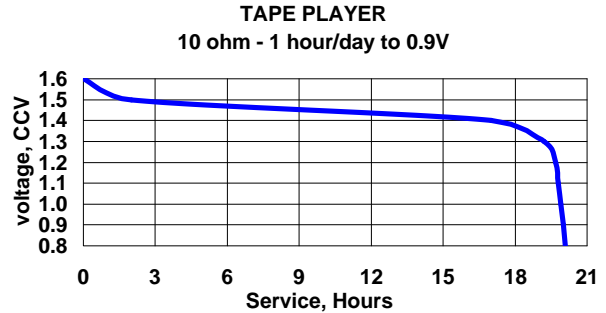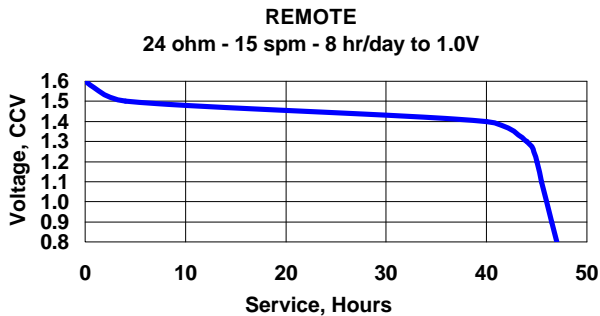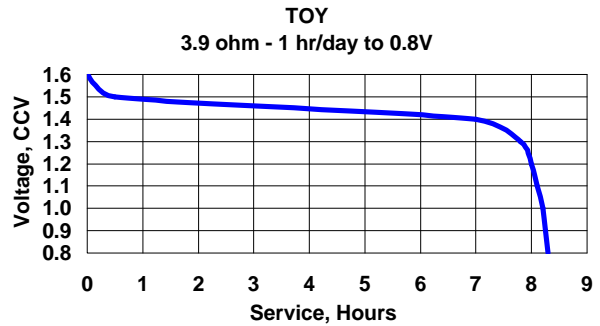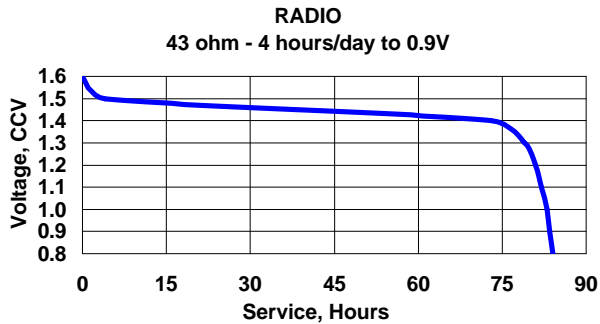

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. Inc. - All Rights Reserved